



2-way Diaphragm Control Valve, stainless steel body, pneumatically operated, port connection DN 15-50

- Hermetical separation of fluids from the operating mechanism by diaphragm
- Integrated cascade process controller with PID algorithm
- Automatic self-adjustment of basic parameters means autotune for the valve and for PID
- Zero dead volume

The diaphragm control valve Type 2731 GP consists of a pneumatically operated piston actuator, a diaphragm and a valve body from cold-formed stainless steel pipe. The actuator has been designed so that the stroke can be continuously changed. This makes a favourable characteristic possible for the continuous change of the flow.

The Type 2731 GP can be actuated by the 8635 SideControl, SideControls 8792/93 Remote versions or the positioners 8692/8693/8694/8630 TopControl Continuous forming a mechanical and functional unit and thus offering a complete control valve system. Using this control valve, continuous regulation tasks for fluids can be solved.

Technical data

| | | |
|--|--------------------------------|--|
| Materials | Body Actuator | Stainless steel 1.4404, 316L PA polyamide (actuators Ø80-125 mm: PPS on request) |
| Sealing materials | | EPDM, PTFE/EPDM (advanced PTFE/EPDM, FKM on request) |
| Process media | | For neutral gases and liquids, high purity, sterile, aggressive or abrasive fluids |
| Viscosity | | Up to viscous |
| Surface finish (average surface finish) glass-beaded | | Ra ≤ 1.6 µm |
| Medium temperatures EPDM, PTFE/EPDM, advanced PTFE/EPDM ¹⁾ (on request) FKM on request | | -10 to +130°C (briefly up to +150°C for steam sterilisation) -10 to +130°C |
| Ambient temperature | | -10 to +60°C (Actuators ≥ 175 mm -10 to +50°C) |
| Control medium (for coupling with a positioner) | | Instrumental air class 3 acc. DIN ISO 8573-1 |
| Pilot pressure | 5.5 to 7 bar | Actuators Ø80 to 125 mm |
| Threads for pilot air | G 1/4 stainless steel (St.st.) | |
| Flow characteristic | | see chart p. 2 |
| Port connections | Weld end | ▪ EN ISO 1127/ISO 4200 ▪ DIN 11850 Series 2 |
| Installation | | As required, preferably with actuator in upright position |

¹⁾ Advanced PTFE/EPDM is recommended for sterilization cycle

Content

| Valve specifications | System Continuous Classic | Request for quotation |
|----------------------|---------------------------|-----------------------|
| Type 2731 GP | Type 8802-DD | Type 8802-DD |

Technical data & ordering info.

p. 1-5



Type 8802-DD

Ordering info. & technical data

p. 6-11


p. 12

Technical data, continued


Kvs values and weights

| Port connection DN [mm] | Actuator size Ø EN ISO 1127/ISO 4200 [mm] | Kvs value EN ISO 1127/ISO 4200 [m^3/h] | Actuator size Ø DIN 11850 Series 2 [mm] | Kvs value DIN 11850 Series 2 [m^3/h] | Weight without positioner [kg] |
|-------------------------|---|--|---|--|--------------------------------|
| 15 | 80 | 5.0 | 80 | 4.5 | 1.4 |
| 20 | 80 | 13.0 | 80 | 4.5 | 1.5 |
| 25 | 80 | 21.0 | 80 | 13.5 | 2.0 |
| 32 | 100 | 33.0 | 80 | 18.0 | 3.6 |
| 40 | 100 | 45.0 | 100 | 24.5 | 3.9 |
| | 125 | 46.0 | 125 | 24.5 | 3.9 |
| 50 | 125 | 70.0 | 125 | 37.0 | 6.9 |

Flow characteristic

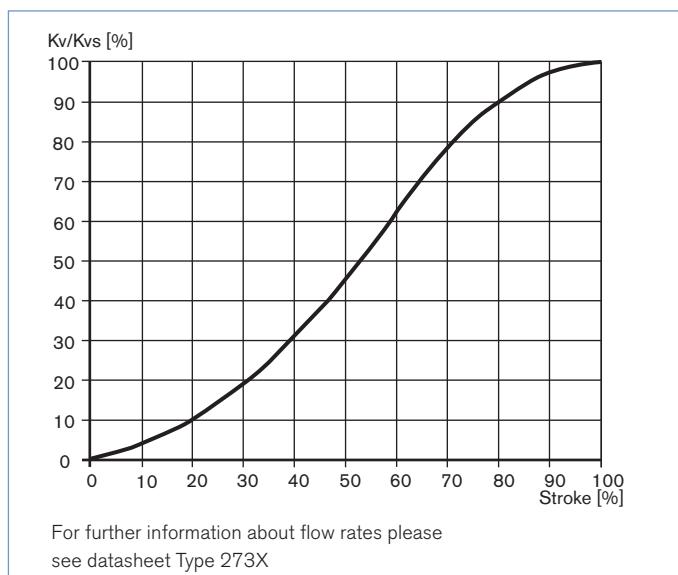


Recommendation for draining operation

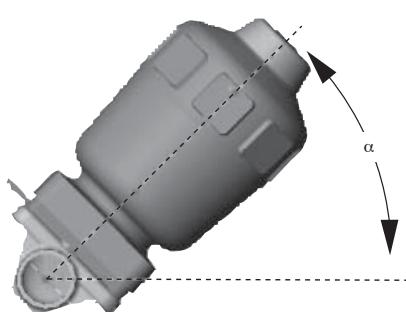

$\alpha = 15$ up to 35° plus 3° to 5° inclination to the pipe axis.
 Installation as required, preferably with actuator in upright position.
 Tilted 1° to 35° to the horizontal and inclined 3 to 5° to the flow direction for draining operation.

Materials

DN 15-50

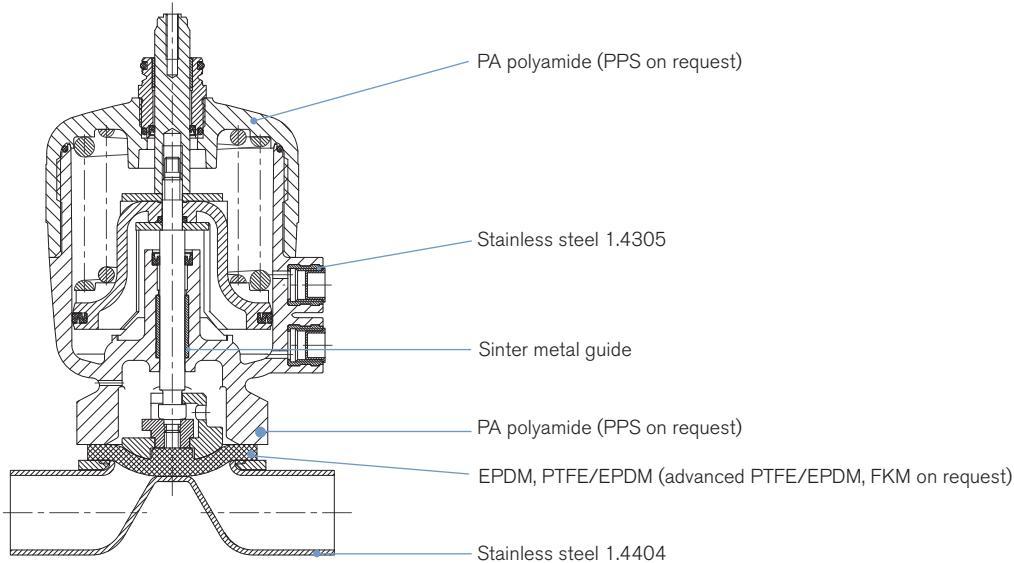





Approvals

Suitable for foodstuffs / sterile applications

-  ▪ The composition of the EPDM, PTFE/EPDM and advanced PTFE/EPDM diaphragms corresponds to the *Code of Federal Regulations*, published by the FDA (Food and Drug Administration, USA).

Ordering chart valve (other versions on request)

Weld ends, PA actuator, permissible media temperature -10 to +130°C


| Control function | Port connection DN [mm] | Orifice (Diaphragm size) [mm] | Actuator size Ø [mm] | Kvs value [m³/h] | Operating pressure max. ¹⁾ [bar] | Item no. weld end EN ISO 1127 / ISO 4200 | Item no. weld end DIN 11850 Series 2 |
|--|-------------------------|-------------------------------|----------------------|------------------|---|--|--------------------------------------|
| EPDM diaphragm material | | | | | | | |
| A  NC by spring return | 15 | 15 | 80 | 5 | 10 | 148 313 | 148 318 |
| | 20 | 15 | 80 | 4.5 | 10 | — | 148 319 |
| | 20 | 80 | 13 | 10 | — | 148 314 | — |
| | 25 | 20 | 80 | 13.5 | 10 | — | 148 320 |
| | 25 | 80 | 21 | 10 | — | 148 321 | — |
| | 32 | 25 | 80 | 18 | 10 | — | 148 321 |
| | 32 | 100 | 33 | 10 | — | 148 316 | — |
| | 40 | 32 | 100 | 24.5 | 10 | — | 148 322 |
| | 40 | 125 | 46 | 10 | — | 148 317 | — |
| | 50 | 40 | 125 | 37 | 10 | — | 148 323 |
| | 50 | 125 | 70 | 8 | — | 147 526 | — |
| B  NO by spring return | 15 | 15 | 80 | 5 | 10 | 148 324 | 148 330 |
| | 20 | 15 | 80 | 4.5 | 10 | — | 148 332 |
| | 20 | 80 | 13 | 10 | — | 148 325 | — |
| | 25 | 20 | 80 | 13.5 | 10 | — | 148 333 |
| | 25 | 80 | 21 | 10 | — | 148 326 | — |
| | 32 | 25 | 80 | 18 | 10 | — | 148 334 |
| | 32 | 100 | 33 | 10 | — | 148 327 | — |
| | 40 | 32 | 100 | 24.5 | 10 | — | 148 335 |
| | 40 | 125 | 46 | 10 | — | 148 328 | — |
| | 50 | 40 | 125 | 37 | 10 | — | 148 336 |
| | 50 | 125 | 70 | 7 | — | 148 329 | — |
| PTFE/EPDM diaphragm | | | | | | | |
| A  NC by spring return | 15 | 15 | 80 | 5 | 10 | 148 337 | 149 274 |
| | 20 | 15 | 80 | 4.5 | 10 | — | 148 344 |
| | 20 | 80 | 13 | 10 | — | 148 338 | — |
| | 25 | 20 | 80 | 13.5 | 10 | — | 148 345 |
| | 25 | 80 | 21 | 7.5 | — | 148 339 | — |
| | 32 | 25 | 80 | 18 | 7.5 | — | 148 346 |
| | 32 | 100 | 33 | 8 | — | 148 340 | — |
| | 40 | 32 | 100 | 24.5 | 8 | — | 148 347 |
| | 40 | 125 | 46 | 10 | — | 148 341 | — |
| | 50 | 40 | 125 | 37 | 10 | — | 147 708 |
| | 50 | 125 | 70 | 7 | — | 148 342 | — |
| B  NO by spring return | 15 | 15 | 80 | 5 | 9 | 148 348 | 148 355 |
| | 20 | 15 | 80 | 4.5 | 8.5 | — | 148 356 |
| | 20 | 80 | 13 | 8.5 | — | 148 349 | — |
| | 25 | 20 | 80 | 13.5 | 8 | — | 148 357 |
| | 25 | 80 | 21 | 8 | — | 148 350 | — |
| | 32 | 25 | 80 | 18 | 8 | — | 148 358 |
| | 32 | 100 | 33 | 10 | — | 148 352 | — |
| | 40 | 32 | 100 | 24.5 | 10 | — | 148 359 |
| | 40 | 125 | 46 | 10 | — | 148 353 | — |
| | 50 | 40 | 125 | 37 | 10 | — | 148 360 |
| | 50 | 125 | 70 | 4 | — | 148 354 | — |

1) with a pilot pressure of 5.5 bar

i Further versions on request**Material**

Actuator: PPS (actuator size 80-125 mm)

Sealing: Advanced PTFE/EPDM, FKM

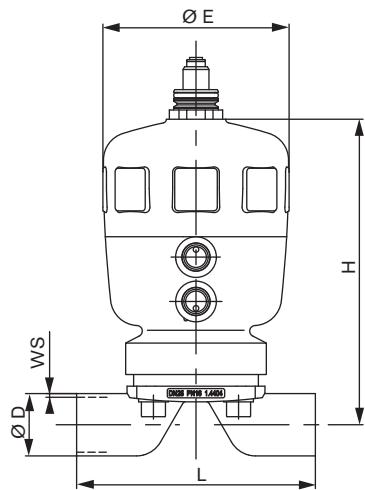Dimensions [mm]**DN 15-50**

| Port connection DN [mm] | Actuator size \varnothing | L | EN ISO 1127/ISO 4200 | | | | DIN 11850 Series 2 | | | |
|-------------------------|-----------------------------|-----|----------------------|-----|-----------------|-----|--------------------|-----|-----------------|-----|
| | | | $\varnothing E$ | H | $\varnothing D$ | WS | $\varnothing E$ | H | $\varnothing D$ | WS |
| 15 | 80 | 110 | 101 | 127 | 21.3 | 1.6 | 101 | 127 | 19 | 1.5 |
| 20 | 80 | 119 | 101 | 162 | 26.9 | 1.6 | 101 | 154 | 23 | 1.5 |
| 25 | 80 | 129 | 101 | 165 | 33.7 | 2.0 | 101 | 158 | 29 | 1.5 |
| 32 | 80 | 148 | — | — | — | — | 101 | 161 | 35 | 1.5 |
| | 100 | 148 | 127 | 215 | 42.4 | 2.0 | — | — | — | — |
| 40 | 100 | 161 | 127 | 219 | 48.3 | 2.0 | 127 | 211 | 41 | 1.5 |
| | 125 | 161 | 153 | 259 | 48.3 | 2.0 | — | — | — | — |
| 50 | 125 | 192 | 153 | 263 | 60.3 | 2.0 | 153 | 259 | 53 | 1.5 |

Ordering information for valve system Continuous Classic Type 8802-DD

A valve system **Continuous Classic Type 8802-DD** consists of an **diaphragm control valve Type 2731** and a digital electropneumatic Positioner **Type 8692**, a digital electropneumatic Process Controller **Type 8693**, a digital electropneumatic Positioner Basic **Type 8694** (below) or a valve actuation system TopControl **Type 8630**, SideControl **Type 8635** or an electropneumatic positioner **Type 8792/8793** (next page) (see separate datasheets). For the configuration of further valve systems please use the "Request for quotation" on p.11 [go to page](#)

You order two components and receive a complete assembled and certified valve.



When you click on the orange box "More info." below, you will come to our website for the resp. product where you can download the datasheet.

Positioner TopControl
Type 8692

[More info.](#)



Process Controller
TopControl Type 8693

[More info.](#)



DeviceNet™



The new generation of integrated positioners/process controllers for combination with actuators from the process valve series Type 23xx/2103 is specially designed for the requirements of hygienic process environments. The easy handling and the selection of additional software functions are done either on a big graphic display with backlight and keypad or via a PC interface. A contact-free analogue position sensor registers the valve position without deterioration. Single-acting or double-acting actuators are controlled via the integral positioner system. With Type 8693, the process controller function is superimposed on the position control loop. Profibus DPV1 and DeviceNet communication interfaces are available as options. Main customer benefits:

- Compact design of the valve system with integrated positioner/process controller meets the demands for plant washdown environments through the selection of materials, external seals and integrated control air supply to the actuator
- Extremely simple commissioning and operation thanks to the back-lighting of the graphics display and proven multilingual software structure
- Automatic parameterisation of the positioner and process controller using the TUNE functions
- Field bus communication via Profibus DPV1 or DeviceNet
- Air intake filter enhances the process valve system availability
- Simple and reliable actuator adaption
- Explosion-proof models for zone 2/22

Positioner TopControl Basic
Type 8694

[More info.](#)



The new generation of integrated positioners for combination with actuators from the process valve series Type 23xx/2103 is specially designed for the requirements of hygienic process environments. The operation and selection of the software functions close tight function, inversion of the operating direction of the setpoint signal, characteristic curves selection and switching manual/automatic operation are effected via push-buttons and DIP switches or via the PC interface. The position setpoint is set using the standard signal 4 - 20 mA. In addition, the enable can be controlled via the binary input and an optional position feedback can be integrated. The positioner, Type 8694, registers the valve position without deterioration through a contact-free analogue position sensor. Single-acting or double-acting actuators are controlled via the integral positioner system. An AS-Interface communication interface is available as an option. Main customer benefits:

- Compact design of the valve system with integrated positioner meets the demands for plant washdown environments through the selection of materials, external seals and integrated control air supply to the actuator
- Automatic parameterisation of the process controller using the Process TUNE function
- Field bus communication via optional AS-Interface
- Air intake filter enhances the process valve system availability
- Simple and reliable actuator adaption allowing additional actuators of the process valve series, Type 20xx or actuators from other manufacturers to be used
- Explosion-proof models for zone 2/22

Ordering information for valve system Continuous Classic Type 8802-DD, continued

A valve system **Continuous Classic Type 8802-DD** consists of an **diaphragm control valve Type 2731** and a digital electropneumatic Positioner **Type 8692**, a digital electropneumatic Process Controller **Type 8693**, a digital electropneumatic Positioner Basic **Type 8694** (previous page) or a valve actuation system TopControl **Type 8630**, SideControl **Type 8635** or an electropneumatic positioner **Type 8792/8793** (below) (see separate datasheets). For the configuration of further valve systems please use the "Request for quotation" on p.11 [go to page](#)

You order two components and receive a complete assembled and certified valve.



When you click on the orange box "More info." below, you will come to our website for the resp. product where you can download the datasheet.

TopControl Type 8630 [More info.](#)



The Type 8630 is an electro-pneumatic positioner for usage with pneumatically operated process valves. The compact design with integrated position encoder and LCD display was developed for demanding applications of the process industry.

Main customer benefits are:

- Time saving algorithms for temperature, flow and pressure PID parameters through ProcessTUNE function.
- Quick and simple menu driven parameterization through keyboard
- Field bus communication via Profibus DPV1 or DeviceNet
- Fits seamlessly to Bürkert's process valve systems
- Break resistant housing
- Suitable for hazardous locations per zone 2 and 22

SideControl Type 8635, 2-wire, intrinsically safe [More info.](#)



Type 8635 is a digital electro-pneumatic positioner with an optional, integrated process controller for precise control requirements. The compact design with integrated position encoder and LCD display was developed for demanding applications of the process industry.

Main customer benefits are:

- Time saving algorithms for temperature, flow and pressure PID parameters through ProcessTUNE function.
- Quick and simple menu driven parameterization through keyboard or Profibus PA
- Remote setpoint adjustment via a 4-20 mA signal
- Adaptation according to IEC534-6 for lift and swivel drives
- Rugged anodised aluminium housing
- Suitable for hazardous locations per zone 1, zone 21 or zone 2 and 22

Positioner SideControl Type 8792 [More info.](#)



Type 8792/8793 is a digital electro-pneumatic positioner with an optional, integrated process controller (8793) for precise control requirements. The compact design with integrated position encoder and LCD display was developed for demanding applications of the process industry. A Profibus DPV1 communication interface is available as an option.

Main customer benefits are:

- Time saving algorithms for temperature, flow and pressure PID parameters through ProcessTUNE function.
- Quick and simple menu driven parameterization through keyboard or Profibus DPV1 PA
- Adaption acc. to IEC534-6 and VDI/VDE 3845 for lift and swivel drives or as a Remote version together with Bürkert process valves
- Rugged anodised aluminium housing
- Suitable for hazardous locations per zone 2/22

[More info.](#)

Process Controller SideControl Type 8793 [More info.](#)


[More info.](#)



Dimensions for valve system Continuous Classic Type 8802-DD [mm]

Dimensions valve system Continuous Classic Type 8802-DD-I with positioner TopControl Type 8692 and 8802-DD-J with process controller TopControl Type 8693 [mm]


DN 15-50

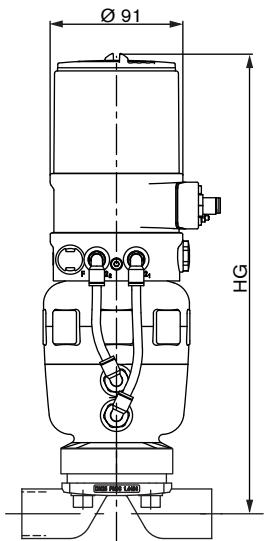

| Port connection DN [mm] | Actuator size ø [mm] | HG [mm] |
|-------------------------|----------------------|---------|
| 15 | 80 | 300 |
| 20 | 80 | 313 |
| 25 | 80 | 316 |
| 40 | 125 | 408 |
| 50 | 125 | 414 |

Further dimensions see p. 5

Dimensions valve system Continuous Classic Type 8802-DD-L with positioner TopControl Basic Type 8694 [mm]

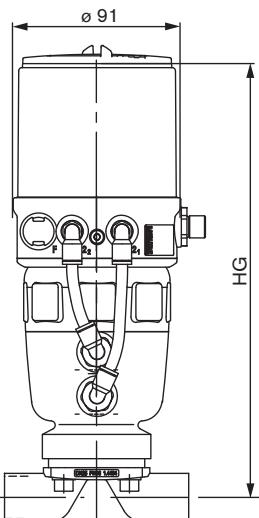


| Port connection DN [mm] | Actuator size ø [mm] | HG [mm] |
|-------------------------|----------------------|---------|
| 15 | 80 | 260 |
| 20 | 80 | 270 |
| 25 | 80 | 273 |
| 32 | 100 | 324 |
| 40 | 100 | 327 |
| | 125 | 366 |
| 50 | 125 | 372 |

Further dimensions see p. 5

Dimensions for valve system Continuous Classic Type 8802-DD [mm], continued

Dimensions valve system Continuous Classic Type 8802-DD-A with positioner TopControl Type 8630 [mm]

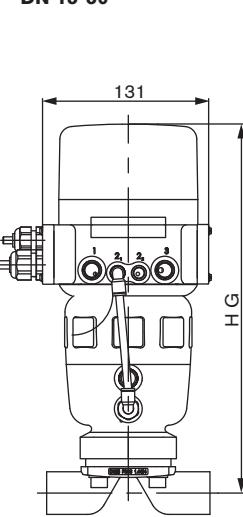


DN 15-50

| Port connection DN [mm] | Actuator size Ø | HG EN ISO 1127/ISO 4200 | DIN 11850 Series 2 |
|-------------------------|-----------------|----------------------------|--------------------|
| 15 | 80 | 254 | 254 |
| 20 | 80 | 289 | 281 |
| 25 | 80 | 292 | 285 |
| 32 | 80 | — | 291 |
| | 100 | 345 | — |
| 40 | 100 | 349 | 341 |
| | 125 | 389 | — |
| 50 | 125 | 393 | 389 |


Further dimensions see p. 5

Dimensions for valve system Continuous Classic Type 8802-DD [mm], continued

Dimensions valve system Continuous Classic 8802-DD-B with positioner SideControl Type 8635 [mm]

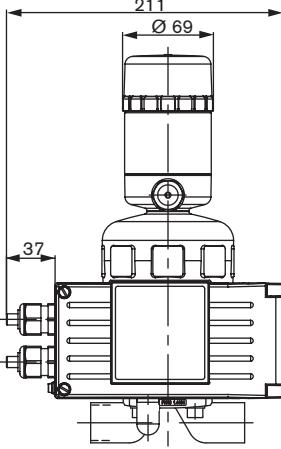

DN 15-50

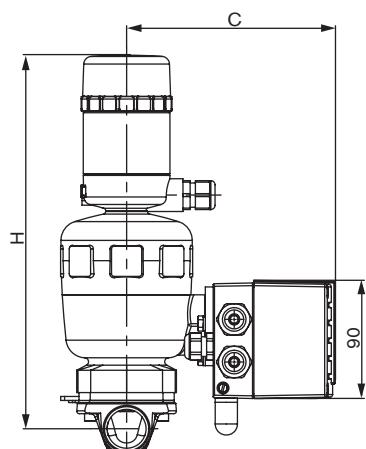


| Port connection DN [mm] | Actuator size [mm] | C | EN ISO 1127 / ISO 4200 H | DIN 11850 S2 H | F |
|-------------------------|--------------------|-----|-----------------------------|-------------------|---|
| 15 | 80 | 159 | 247 | 247 | |
| 20 | 80 | 159 | 282 | 274 | |
| 25 | 80 | 159 | 285 | 278 | |
| 40 | 125 | 185 | 379 | — | |
| 50 | 125 | 185 | 383 | 379 | |

Further dimensions see p. 5

Dimensions for valve system Continuous Classic Type 8802-DD [mm], continued

Dimensions valve system Continuous Classic 8802-DD-P with Positioner SideControl Remote Type 8792 and Type 8802-DD-Q with Process Controller SideControl Remote Type 8793 [mm]

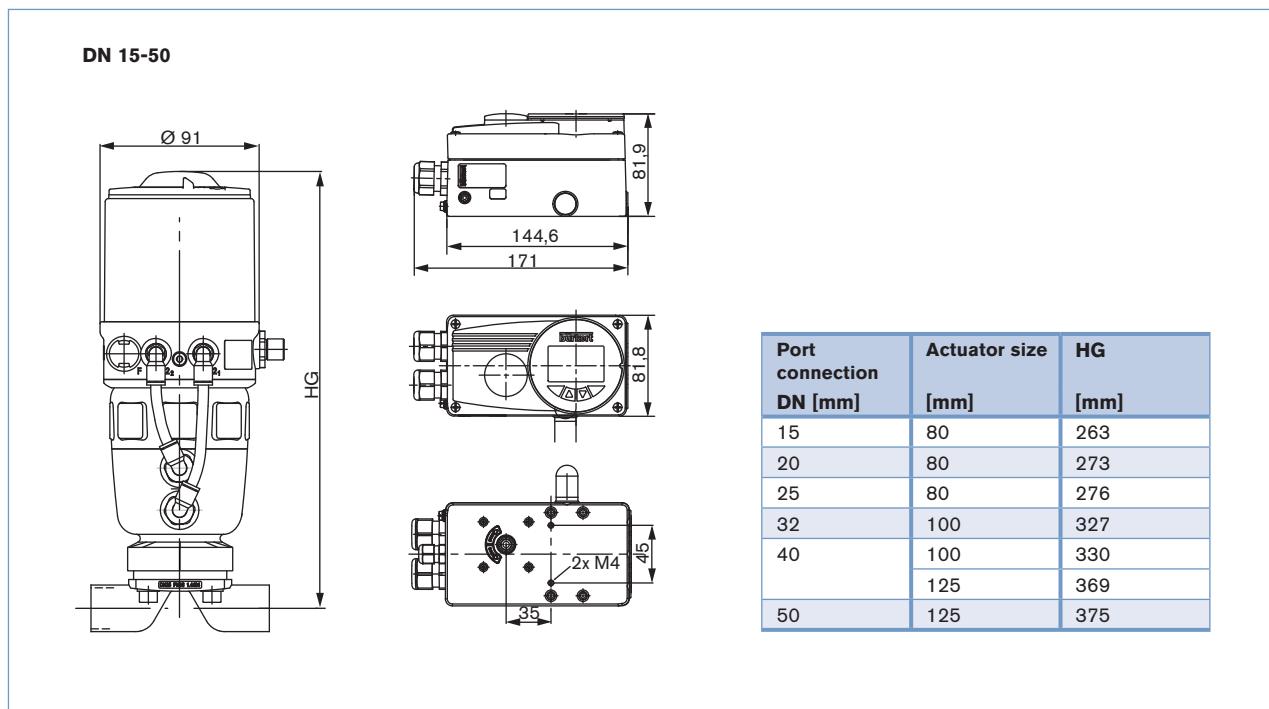

Further dimensions see p. 5

Note

You can fill out the fields directly in the PDF file before printing out the form.

Valve system Continuous Classic Type 8802-DD - Request for quotation

► Please fill out and send to your nearest Bürkert facility* with your inquiry or order

| | |
|---------------|----------------|
| Company | Contact person |
| Customer no. | Department |
| Address | Tel./Fax |
| Postcode/town | E-Mail |

= mandatory fields to fill out

Quantity

Required delivery date

Operating data

Pipeline

DN

PN

Pipe material

Process medium

Type of media

Liquid

Steam

Gas

min

standard

max

unit

Flow rate (Q, Q_N, W)¹⁾

Temperature at valve inlet

Absolute pressure at valve inlet

¹⁾ standard unit: Liquid Q = m³/h; Steam W = kg/h; Gas Q_N = Nm³/h

Valve features

Specification key

automatically transferred
from last page

[go to page](#)

| | | | | | | | |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <input type="checkbox"/> |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|

Surface finish (if not standard)

internal μm

external μm

Pilot pressure

min.

max.

continued next page

* To find your nearest Bürkert facility, click on the orange box →

www.burkert.com

Valve system Continuous Classic Type 8802-DD - Request for quotation, continued

| Control unit features | | |
|---|---|--|
| <input type="checkbox"/> Positioner TopControl Type 8692 More info. <input type="checkbox"/> Process Controller TopControl Type 8693 More info. | | <input type="checkbox"/> Positioner TopControl Basic Type 8694 More info. |
| <p>Pneumatic function</p> <input type="checkbox"/> Single-acting <input type="checkbox"/> Double-acting | | |
| <p>Communication</p> <input type="checkbox"/> Profibus <input type="checkbox"/> DeviceNet | | |
| <p>Electrical connection</p> <input type="checkbox"/> Cable gland <input type="checkbox"/> Multipol connection | | |
| <p>Feedback</p> <input type="checkbox"/> 4-20 mA <input type="checkbox"/> 4-20 mA + 2 binary outputs | | |
| <p>Initiator</p> <input type="checkbox"/> Initiator | | |
| <p>Please specify item no. if known:</p> <input type="text"/> | | |
| <p>Pneumatic function</p> <input type="checkbox"/> Single-acting | | |
| <p>Pilot air ports</p> <input type="checkbox"/> Push-in connector external ø 6 mm or 1/4" | | |
| <input type="checkbox"/> Thread G 1/8" | | |
| <p>Electrical connection</p> <input type="checkbox"/> Cable gland <input type="checkbox"/> Multipol connection | | |
| <p>Feedback</p> <input type="checkbox"/> 4-20 mA | | |
| <p>Please specify item no. if known:</p> <input type="text"/> | | |
| <input type="checkbox"/> Positioner TopControl Type 8630 - 3-wire More info. | <input type="checkbox"/> Positioner SideControl Type 8635 - 2-wire More info. | <input type="checkbox"/> Positioner SideControl Remote Type 8792 More info. <input type="checkbox"/> Process Controller SideControl Remote Type 8793 More info. |
| <p>Power supply 24 VDC</p> | | |
| <p>Communication</p> Setpoint / feedback analogue signal or via BUS <input type="checkbox"/> Profibus DP <input type="checkbox"/> DeviceNet | | |
| <input type="checkbox"/> Positioner version Input 0/4 - 20 mA / 0-5/10 V Feedback <input type="checkbox"/> 4 - 20 mA or <input type="checkbox"/> Binary | | |
| <input type="checkbox"/> PID Controller version ³⁾ Input measuring signal 4 - 20 mA / Pt100 / Frequency | | |
| <p>Inductive proximity switch</p> <input type="checkbox"/> 1 <input type="checkbox"/> 2 | | |
| <p>Please specify item no. if known:</p> <input type="text"/> | | |
| <input type="checkbox"/> Standard <input type="checkbox"/> ATEX/FM Zone 1 <input type="checkbox"/> Zone 2/22 | | |
| <p>Power supply 24 VDC</p> via setpoint or BUS | | |
| <p>Communication</p> Setpoint / feedback analogue signal or via BUS <input type="checkbox"/> Profibus PA | | |
| <input type="checkbox"/> Positioner version Input 4 - 20 mA Feedback <input type="checkbox"/> 4 - 20 mA or <input type="checkbox"/> Binary | | |
| <input type="checkbox"/> PID Controller version ³⁾ Input measuring signal 4 - 20 mA | | |
| <p>Inductive proximity switch</p> <input type="checkbox"/> 1 <input type="checkbox"/> 2 | | |
| <p>Please specify item no. if known:</p> <input type="text"/> | | |
| <p>Power supply 24 VDC</p> | | |
| <p>Communication</p> <input type="checkbox"/> Without <input type="checkbox"/> Profibus DPV1 | | |
| <p>Feedback</p> <input type="checkbox"/> Analogue feedback + 2 binary outputs <input type="checkbox"/> 2 binary outputs | | |
| <p>Electrical connection</p> <input type="checkbox"/> Cable gland <input type="checkbox"/> Multipol connection | | |
| <p>Please specify item no. if known:</p> <input type="text"/> | | |

³⁾ same setpoint for input and feedback signal as for Positioner version

Certifications

- Attestation of compliance with the order EN-ISO 10204 2.1 (Item-No. 440 788)
- Test report EN-ISO 10204 2.2 (Item-No. 803 722)
- EN161 (European Gas Device guideline)
- FDA - USP certificate

Valve features, specification key

